

# PowerPDU 4PV


# NETIO

PowerPDU 4PV is a PDU (Power Distribution Unit) with 4 power outputs (4x powerCON) controlled over a LAN. Each output can be switched on/off/toggle individually over the web interface, NETIO Cloud service or the mobile app. Open API enables integration with 3rd party systems. using a wide range of protocols (http JSON, Modbus/TCP, SNMP, MQTT-flex, Telnet, ...).

- LAN (Ethernet)
- **Input:** powerCON
- **Output:** 4x powerCON sockets

---

- **HTTPs supported,** Open API (10 protocols, M2M API)
- **Mobile app:** NETIO Mobile 2
- **Service:** NETIO Cloud

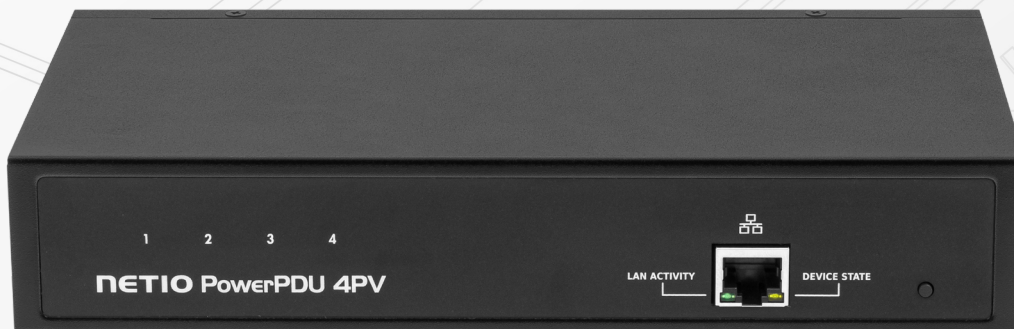

Each output can be switched On/Off remotely. Outputs can be switched ON in a sequence after a power-up or restoration by configuring a custom power-up delay interval for each output individually.

NETIO PowerPDU 4PV can be mounted in 19" rack cabinets – horizontally, vertically, or as a 1U device.

The **NETIO Mobile 2** app controls each output individually over LAN (local network) or NETIO Cloud.

**NETIO Cloud** is a SSL-secured service for controlling multiple devices from anywhere (Web or Cloud API).

**Open API** (such as HTTPs, XML/JSON over HTTP, SNMP, Modbus/TCP, MQTT-flex, Telnet and others...) enables integration with third party systems (controlling the outputs over the network).

**AV drivers** make it easy to connect NETIO sockets to a professional Audio/Video control systems such as Utelogy, Crestron, Control4, RTI, Savant and more.

**The Scheduler function** (calendar) - time based switching.



**UL Certification**



**Remote control of a device with a mobile app (LAN/Cloud)**



**Remote switching on/off or power-cycling of the electrical outputs**



**Central web interface for controlling multiple devices**



**Controlled power-up: Outputs are switched on in a defined order with a delay**



**Drivers for AV systems and installations (Utelogy, Crestron, Control4, RTI, ELAN, SKAARHOJ...)**



**Energy savings - SOHO applications**

## FEATURES

- 4x powerCON power output
  - Each output can be switched on/off individually
  - Methods for controlling each output:
    - WEB browser
    - Mobile app: NETIO Mobile 2 (iOS and Android)
    - NETIO Cloud
    - Scheduler
    - Watchdog (Ping)
    - Rules & Conditions (based on DI / NETIO T1 Sensor)
    - Open API (10 protocols)
- 
- **NETIO Mobile 2:** Mobile app
  - **NETIO Cloud:** Service for controlling multiple devices
- 
- **ZVS (Zero Voltage Switching):** The relay is switched when the voltage crosses zero. It reduces relay wear and allows switching devices with a high Inrush Current.
  - **Ping Watchdog:** "Heartbeat" detection function.
  - FW upgrade over the Web interface
  - **The Scheduler function:** Time based switching
- 
- **Open API (protocols)**
    - JSON over HTTP(s)
    - Modbus/TCP
    - MQTT-flex
    - Telnet
    - SNMP (SNMP v1/v3)
    - XML over http(s)
    - URL API – http get
    - HTTP Push JSON / XML
  - Supported protocols: HTTP(s), DNS, NTP, uPNP, DHCP, ICMP, TCP/IP

## SUPPORT FOR USERS AND DEVELOPERS

- NETIO Wiki – library for developers
- ANxx (Application Notes) with examples
- NETIO Drivers – for AV control systems

## SPECIFICATIONS

### POWER

- Power input: powerCON (100-240V AC), max 16A
- Power output: 4x powerCON, max 16A each
- Each output: On/Off (relay SPST-NO)
- **ZVS (Zero Voltage Switching):** Yes
- Internal consumption: 1-3 W
- **PowerUp State:** Default output state (On/Off/Last state)
- **PowerUp Delay:** Delay before switching output on

### INTERFACES

- LAN 10/100 Mbps (RJ-45)
- LED indicators in the RJ45 jack & M2M LED

### ELECTRICAL MEASUREMENTS (no)

- Does not support electrical measurement

### PACKAGE CONTENTS

- NETIO PowerPDU 4PV
- QIG (printed Quick Installation Guide)
- Power cord is not included

### DIMENSIONS / WEIGHT

- PowerPDU 4PV: 8.66 x 1.57 x 4.72 mm / 1.65 lb  
(220 x 40 x 120 mm / 750 g)
- Package: 10.04 x 2.87 x 8.03 mm / 2.58 lb  
(255 x 73 x 204 mm / 1.17 kg)

### OPERATING CONDITIONS

- Temperature -4 °F to 149 °F / 5A (-4 °F to 122 °F / 16A)  
(-20 °C to 65 °C / 5A (-20 to 50 °C / 16A))
- For indoor use only (IP30)

**NORMS:** UL 62368-1, CAN/CSA C22.2 No. 62368-1, FCC 47 CFR - Part 15 , ICES-003

NETIO PowerPDU	4PB
NETIO PowerPDU	4PS nc
NETIO PowerPDU	4PS US
NETIO PowerPDU	4PV

LAN PDU with 4 outputs NEMA 5-15R, switching. The power cord NEMA 5-15P to C13 is included.

LAN PDU with 4 outputs IEC-320 C13, switching. The power cord is not included.

LAN PDU with 4 outputs IEC-320 C13, switching. The power cord NEMA 5-15P to C13 is included.

LAN PDU with 4 outputs powerCON, switching. The power cord is not included.